


Structure of Internet Phone
Keypad

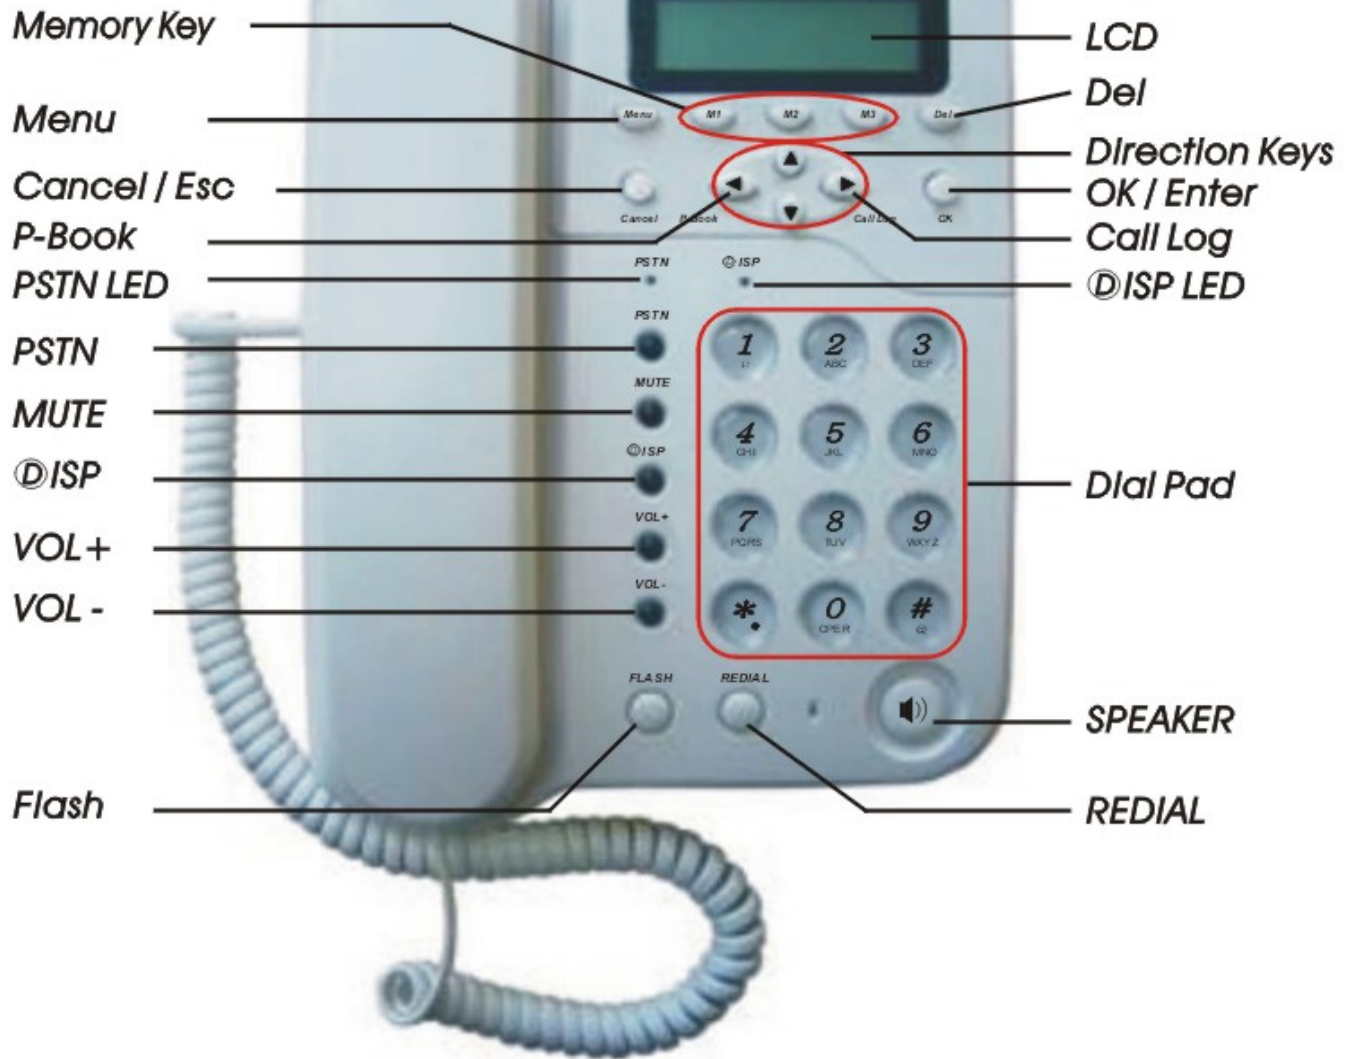

The description for each key is as follows.

Key name	Description
Menu	Use to call up the menu Use to change between preferences when entering characters (English-capital and lowercase / numerical / special characters).
M1~M3	Memory dial
DEL	Use to delete the characters in Pre-dial and Phone Book mode.
▲	Use to move up the cursor to select menu.
▼	Use to move down the cursor to select menu.
▶ Call Log	Use to move the cursor to the right in Phone Book mode. Use to call up the Call Log menu in off hook mode.
◀ P-Book	Use to move the cursor to the left in Phone Book mode. Use to call up Phone Book menu.
OK	Use to complete the input in Phone Book menu. Use to confirm the entered or selected settings.
Cancel	Use to cancel the selected menu, entered data, or etc.
PSTN	Use to place the PSTN call.
MUTE	Use to make the voice not to be heard from the counterpart.
ⓀISP	Used to connect to dial-up ISP. (Option).
VOL + / -	Use to adjust the volume of the handset
FLASH	Use to place another call while dialing or in the middle of a call. (Available only in PSTN mode).
REDIAL	Use to redial the number last dialed
SPK	Use to carry on the call without picking up the handset. Press again to turn off the speaker phone

LCD Display



The LCD screen shows the current status of the Internet Phone, menu options on the LCD screen, Telephone number dialed or received etc. (4x15)

First Line	Status display – displays the present state of the Internet Phone.
Second Line	Name display – displays the name.
Third Line	Telephone number display – displays the number entered with the key pad.
Fourth Line	Balance (Prepaid) / Time display - displays the balance and the remaining time.

The following are icons used to display the present state of the IP Phone

Icon	Name	Function
T	DNS Status	Displays the DNS status. T flashing : Finding the DNS server T : Received the IP address of the DNS
.lll	Gatekeeper Status	Displays the Gatekeeper registration status. .lll flashing : Trying to register with Gatekeeper. .lll : Registered with Gatekeeper successfully.
☑	Call status display	☑ : Displayed when the call is connected successfully. ☒ : Displayed when the call isn't connected.
ST DH PP	Kinds of connection	ST : Static IP DH : DHCP PP : PPPoE
🔇	Mute	Displayed when using Mute function.
💾	Flash save display	Displayed when data is being saved in memory
🖥️	PC Link	Displayed when the PC is connected to the phone. (NAT).
🌐	Ethernet	Displayed when the Internet Phone is connected to the Internet.
📡	Modem	Displayed when the Modem is connected.
🌞	Summer Time	Displayed when the summer time is applied.
# 0 1	Entry mode	Displays the input mode. # : Symbols 0 : English Lower Case 1 : English Capital 1 : Nemeric.
⬆️	Up/Down Arrow Key	Displayed only when the up/down arrow key is available for menu selection.

LED Display

PSTN	• Lighted when using PSTN mode.
ⓀISP	• Lighted when using Dial-up connection.